



# INSTALLATION GUIDE

PERFORMANCE AIR INTAKE, FITS VOLKSWAGEN MK7  
GOLF/GTI/R & AUDI A3/S3 2015+ | SKU: MMAI-MK7-15X

## TABLE OF CONTENTS

**Pg 01** RESOURCES & CONTACT INFORMATION

**Pg 02** EXPLODED DIAGRAM  
PARTS BREAKDOWN

**Pg 03** IMPORTANT SAFETY INFORMATION  
TOOLS NEEDED  
INSTALLATION TIME  
INSTALLATION DIFFICULTY  
INSTALLATION INSTRUCTIONS

**Pg 06** DISPOSAL INSTRUCTIONS  
WARRANTY INFORMATION

## RESOURCES & CONTACT



**CALL 1-877-GOMISHI**

CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST



**MISHIMOTO**



**GOMISHIMOTO**



**MISHIMOTO**




**WEBSITE**

[WWW.MISHIMOTO.COM](http://WWW.MISHIMOTO.COM)





**ENGINEERING BLOG**

[WWW.MISHIMOTO.COM/ENGINEERING](http://WWW.MISHIMOTO.COM/ENGINEERING)

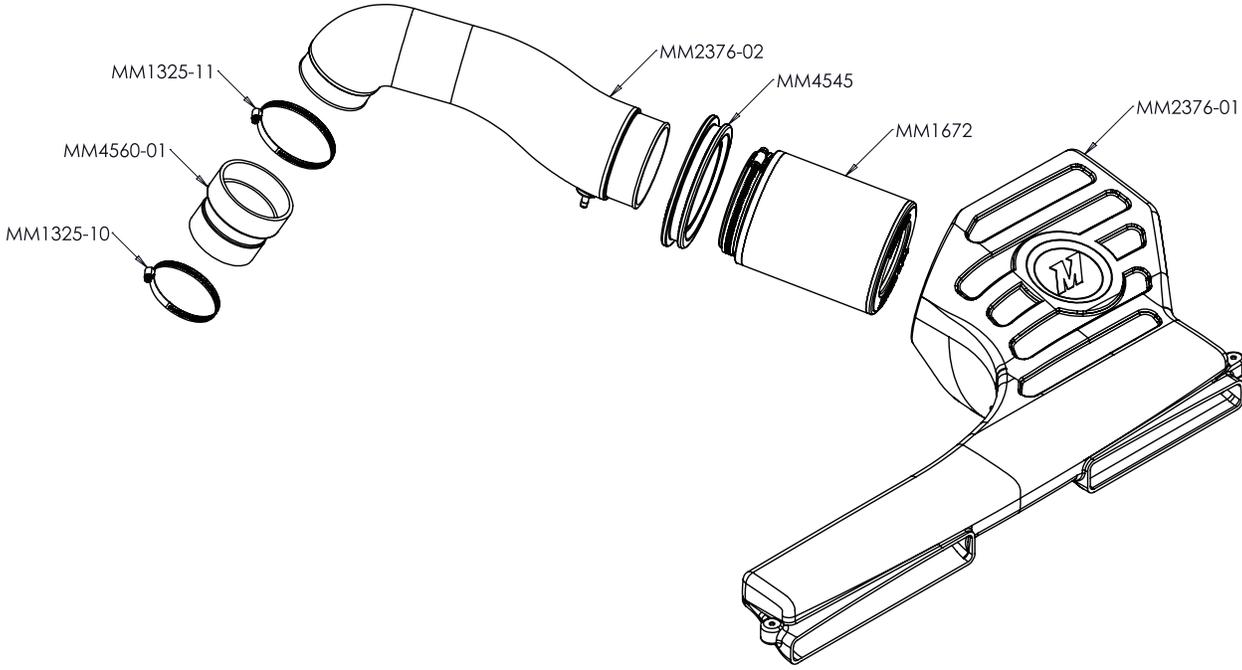

PARTS BREAKDOWN		
PART NUMBER	DESCRIPTION	QTY
MM2376-01	AIR BOX	1
MM2376-02	INTAKE TUBE	1
MM79-09	AIR FILTER 1	1
MM1672	AIR FILTER 2	1
MM4545	INTAKE TUBE GROMMET	1
MM4560-01	COUPLER	1
MM1700-01	SECONDARY AIR FILTER ADAPTER	1
MM1342-10	RUBBER CAP	1
MM4572-01	COOLANT HOSE	1
MM1325-2	WORM GEAR CLAMP (12-20MM RANGE)	2
MM1325-10	WORM GEAR CLAMP (60-80MM RANGE)	1
MM1325-11	WORM GEAR CLAMP (70-90MM RANGE)	1

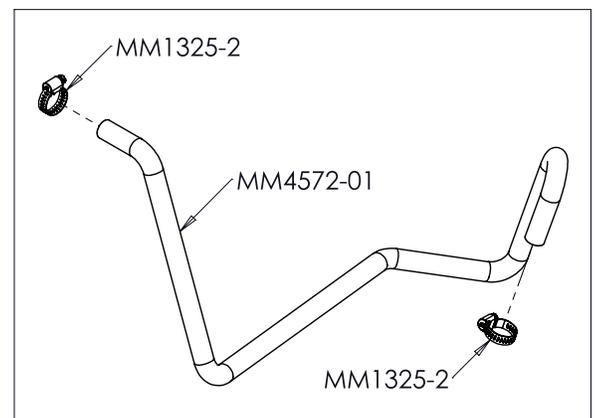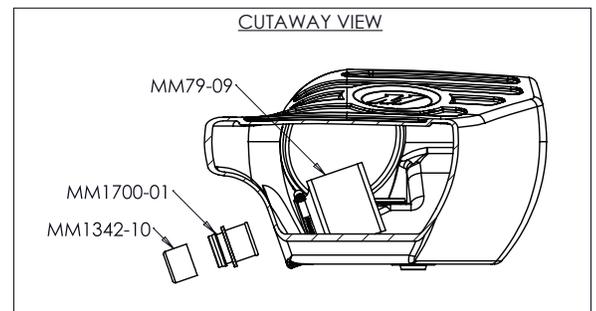

## IMPORTANT SAFETY INFORMATION

- Mishimoto recommends you use safety glasses and protective gloves during the install of their products
- Raise vehicle only on jack stands or on a vehicle lift
- Allow vehicle to cool completely prior to attempting installation
- Do not run the engine or drive the vehicle while overheating; serious damage can occur
- Please dispose of any liquids properly
- Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

**INSTALLATION TIME 1.5 HOURS**

**INSTALLATION DIFFICULTY**     


## TOOLS NEEDED

7MM SOCKET	PLIERS
8MM SOCKET	DRAIN PAN
T25 TORX	FUNNEL
¼" RATCHET AND EXTENSION	

## INSTALLATION INSTRUCTIONS

**1.** Drain the engine coolant.

\*The install can be completed without draining the engine coolant; however, this method will cause some coolant to spill into the engine bay\*

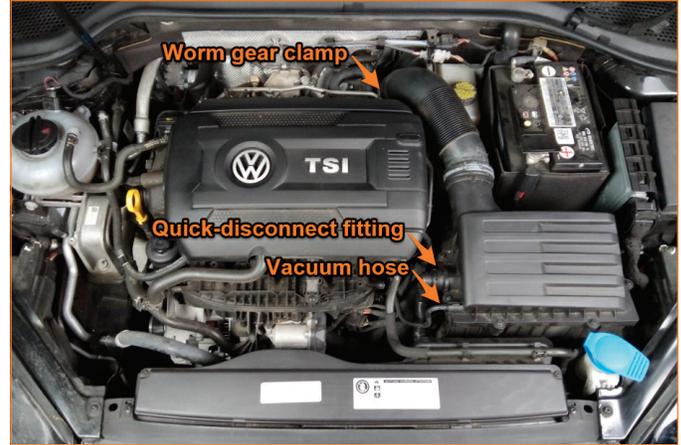

**2.** Remove the stock airbox and intake tube. (1x worm gear clamp, 1x vacuum hose, 1x quick-disconnect fitting)




**3.** Remove the stock air duct. (2x T25 torx screws)



**4.** Remove the stock coolant hose from the driver's side of the radiator. (2x spring clamps)

CONTINUED ON FOLLOWING PAGE

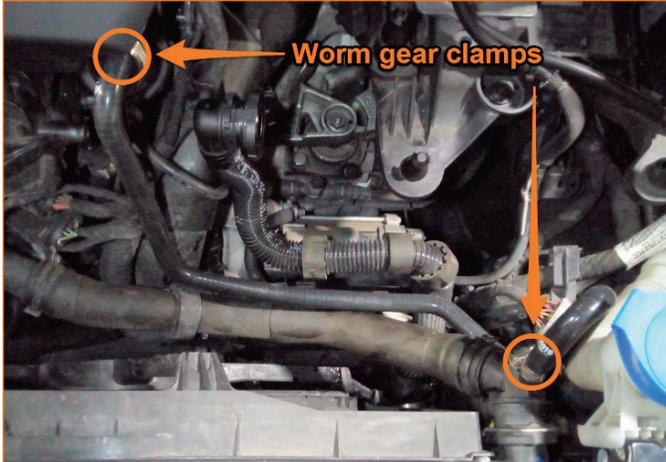


**5.** Install the Mishimoto coolant overflow hose using the provided clamps. (2x MM1325-2)



**6.** Install the secondary air injection system filter into the Mishimoto airbox. (1x MM79-09, 1x MM1700-01)

\*If the vehicle is not equipped with the secondary air injection system, place the provided MM1342-10 rubber cap over the MM1700-01 fitting.\*

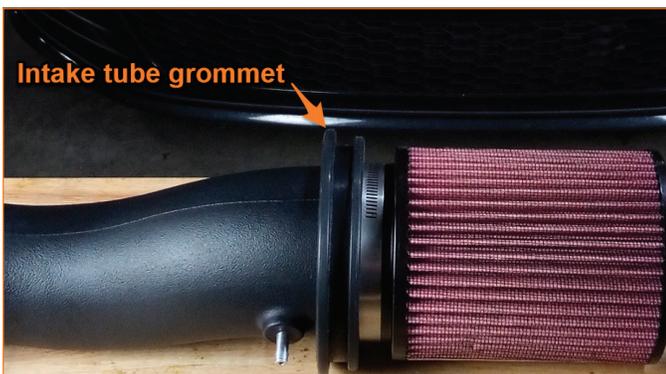

**7.** Slide the intake tube grommet over the intake tube, then install the air filter. (1x MM4545, 1x MM1672)



**8.** Install the coupler to the intake tube using the provided worm gear clamp. (1x MM1325-11)



**9.** Install the intake tube assembly into the airbox. Starting from one spot, push the intake tube grommet into the airbox cutout until it is fully seated.



**10.** Place the intake assembly into the engine bay and connect the vacuum hose and quick-disconnect fitting.

CONTINUED ON FOLLOWING PAGE



**11.** Secure the coupler to the turbo inlet pipe using the provided worm gear clamp. (1x MM1325-10)

**12.** Align the pre-installed grommets on the bottom of the airbox with the pegs in the engine bay, then push down on the airbox to secure it in place.



**13.** Secure the front of the airbox to the vehicle using the 2x T25 torx screws removed in step 2.

**14.** Refill and bleed the cooling system.

**Congratulations! You have finished your installation.**

**\*For Disposal Instructions and Warranty Information continue to the following page.**

## DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals.

## WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.
- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on [Mishimoto.com](http://Mishimoto.com) in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.

- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



**WARNING**  
Cancer and  
Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit: [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)