



INSTALLATION GUIDE

PERFORMANCE TURBO INLET PIPE, FITS VOLKSWAGEN &
AUDI MQB PLATFORM (1.8T/2.0T) 2015+ | SKU: MMAI-MK7-TI

TABLE OF CONTENTS

Pg 01 RESOURCES & CONTACT INFORMATION

Pg 02 EXPLODED DIAGRAM

Pg 03 PARTS BREAKDOWN

IMPORTANT SAFETY INFORMATION

TOOLS NEEDED

INSTALLATION TIME

INSTALLATION DIFFICULTY

INSTALLATION INSTRUCTIONS

Pg 05 DISPOSAL INSTRUCTIONS

WARRANTY INFORMATION

RESOURCES & CONTACT



CALL 1-877-GOMISHI

CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST



MISHIMOTO



GOMISHIMOTO



MISHIMOTO




WEBSITE



ENGINEERING BLOG

WWW.MISHIMOTO.COM/ENGINEERING

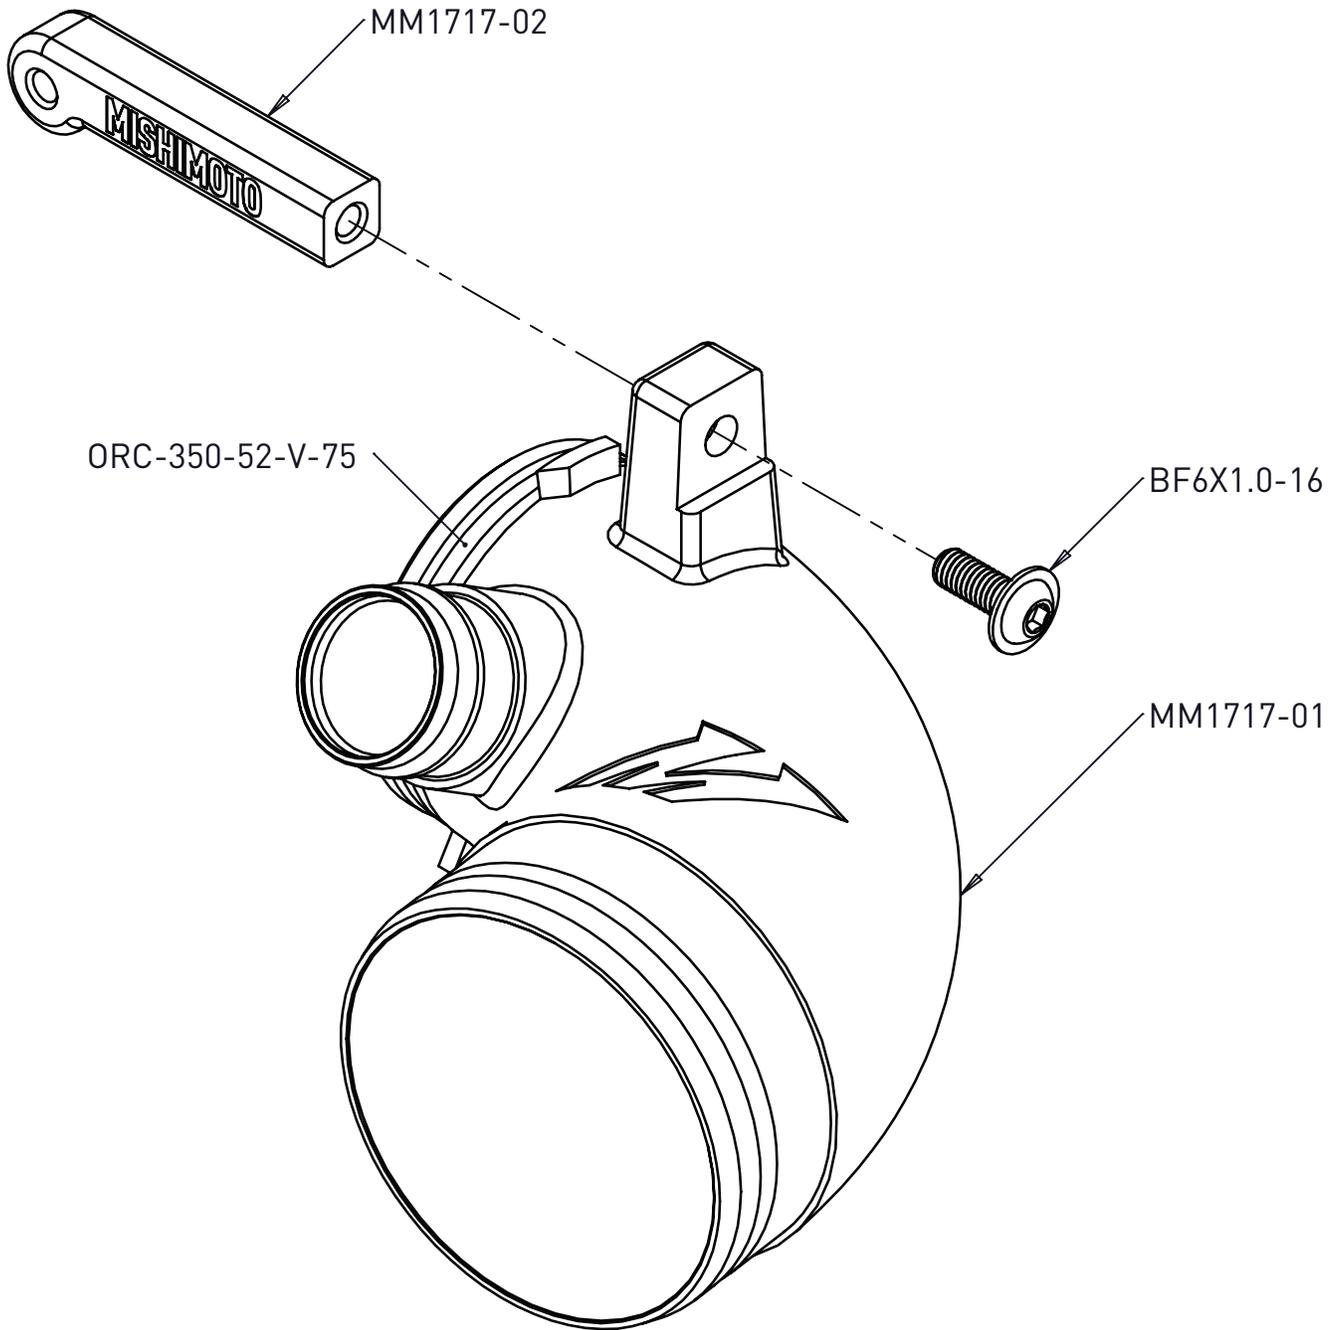

PARTS BREAKDOWN

PART NUMBER	DESCRIPTION	QTY
MM1717-01	PIPE	1
MM1717-02	BRACKET	1
BF6X1.0-16	BOLT	2
ORC-350-52-V-75	O-RING	1

IMPORTANT SAFETY INFORMATION

- › Mishimoto recommends you use safety glasses and protective gloves during the install of their products
- › Raise vehicle only on jack stands or on a vehicle lift
- › Allow vehicle to cool completely prior to attempting installation
- › Do not run the engine or drive the vehicle while overheating; serious damage can occur
- › Please dispose of any liquids properly
- › Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- › If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

INSTALLATION TIME 30 MINUTES

INSTALLATION DIFFICULTY 

TOOLS NEEDED

- | | |
|--------------|------------------|
| 7MM SOCKET | 4MM ALLEN WRENCH |
| 1/4" RATCHET | PICK TOOL |
| T-30 TORX | PLIERS |

INSTALLATION INSTRUCTIONS

1. Remove the worm gear clamp and spring clamp securing the air intake tube to the stock turbo inlet pipe and air box. (1x worm gear clamp, 1x spring clamp)



2. Remove the PCV breather hose quick-disconnect fitting from the stock turbo inlet pipe using a pick tool. (1x quick-disconnect fitting)




CONTINUED ON FOLLOWING PAGE

3. Loosen the T-30 Torx bolt securing the stock turbo inlet pipe. This bolt is a captive fastener and should not be removed from the turbocharger. (1x T-30 Torx bolt)



4. Rotate the stock turbo inlet pipe clockwise (towards the firewall) and then pull it away from the turbocharger to remove.

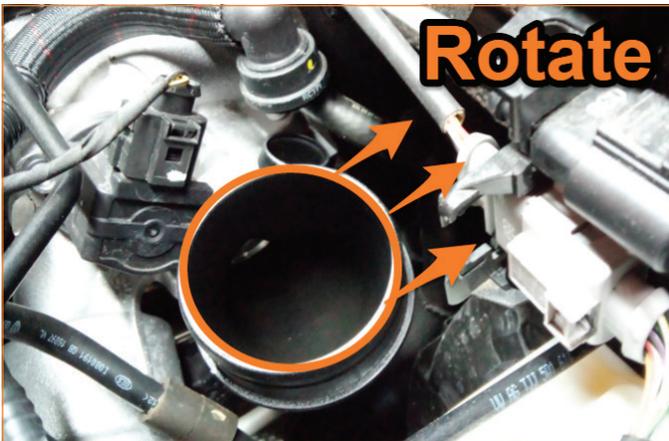

5. Fasten the MM1717-02 bracket to the MM1717-01 pipe using the provided Allen bolt. Leave the bolt loose. (1x BF6X1.0-16 bolt)



6. Align the Mishimoto turbo inlet pipe with the turbocharger inlet, then push inward and rotate counterclockwise. Tighten the T-30 Torx bolt first, then tighten the Allen bolt.



7. Connect the PCV breather hose to the Mishimoto turbo inlet pipe.



8. Reinstall the air intake tube. (1x worm gear clamp, 1x spring clamp)



Congratulations! You have finished your installation.

DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals.

WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.
- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on Mishimoto.com in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.

- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



WARNING
Cancer and
Reproductive Harm
www.P65Warnings.ca.gov

This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit: www.p65warnings.ca.gov