

#TL100128

INSTALLATION MANUAL

CI100039

APR TSI Plastic Intake

APR



Notes:

These instructions were written for a North American specification Mk5 Sportwagen, but other models, like the Mk6 GTI and Audi A3 are similar.

When disassembling the car, be sure to keep all fasteners so they can be reused. It is recommend that you get some kind of compartmented tray to organize the fasteners, such as a fishing tackle box or several large ice cube trays. Fasteners that are not reused for reinstallation are noted in the instructions. All directions used in this manual (right, left, front, etc.) are based on if you were sitting in the drivers seat of the car.


These instructions assume that you have basic mechanical skills and several varieties of basic hand tools in order to install the kit. If you have any questions about the install, feel free to contact your APR representative.



WWW.GOAPR.COM

4800 US HWY 280 West Opelika Alabama 36801

TL100128

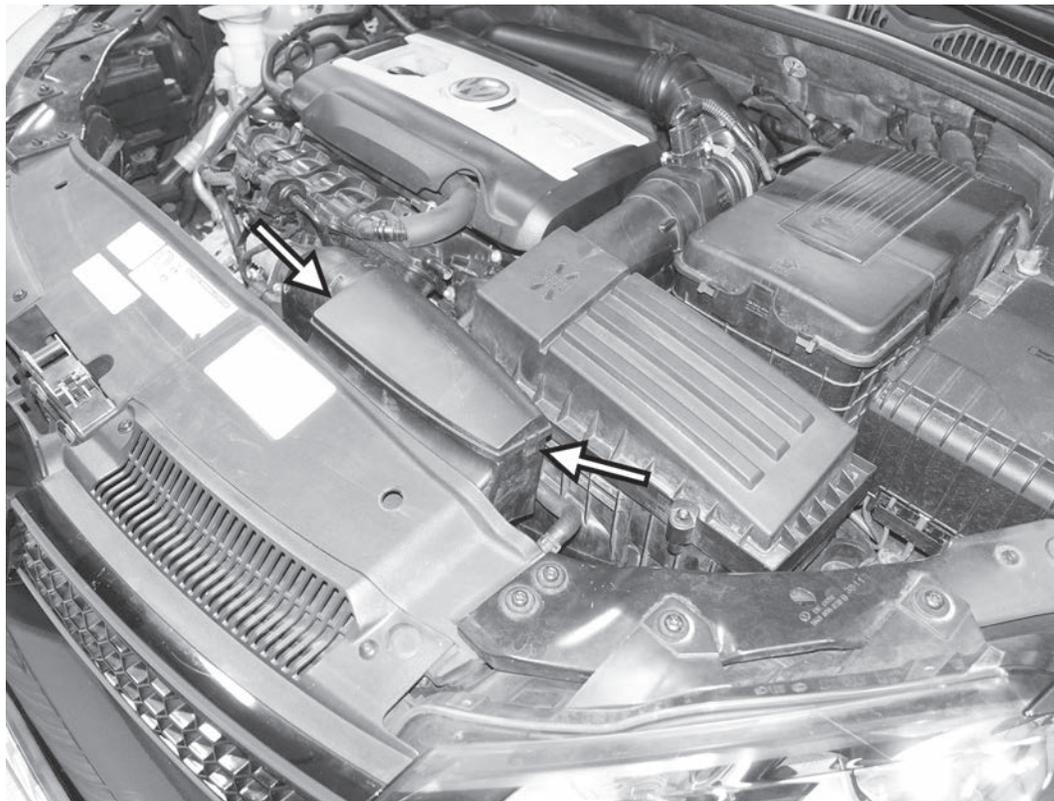


1) Lift up on the clips on both sides of the inlet scoop cover to remove the cover from the car.

2) Lift up on the inlet elbow to separate it from the inlet scoop. Push down on the middle of the accordian section of the inlet elbow to release the inlet elbow from the bottom of the airbox, and remove the inlet elbow from the car.



TL100128

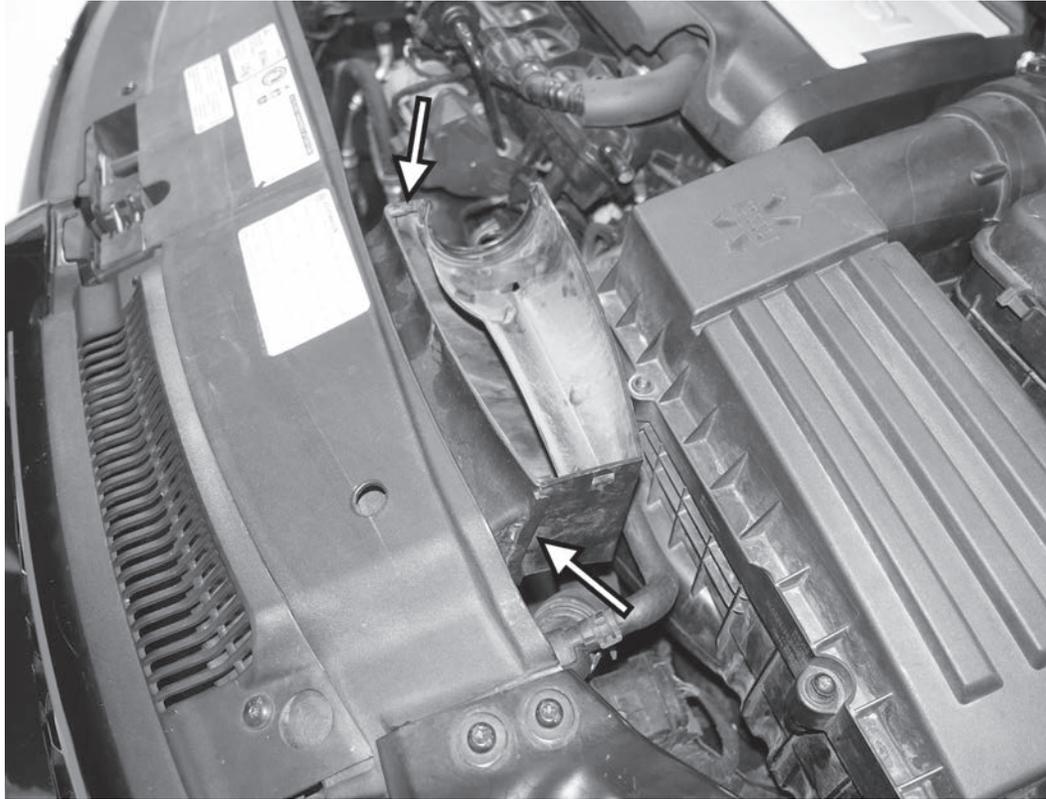


3) Press in the tabs on both sides of the inlet scoop, and rock the inlet scoop back to separate the inlet scoop from the radiator core support. Remove the inlet scoop from the car.

APR


4) Disconnect the electrical connector to the factory MAF sensor. Unclip the MAF sensor harness from the back of the accordion inlet elbow.




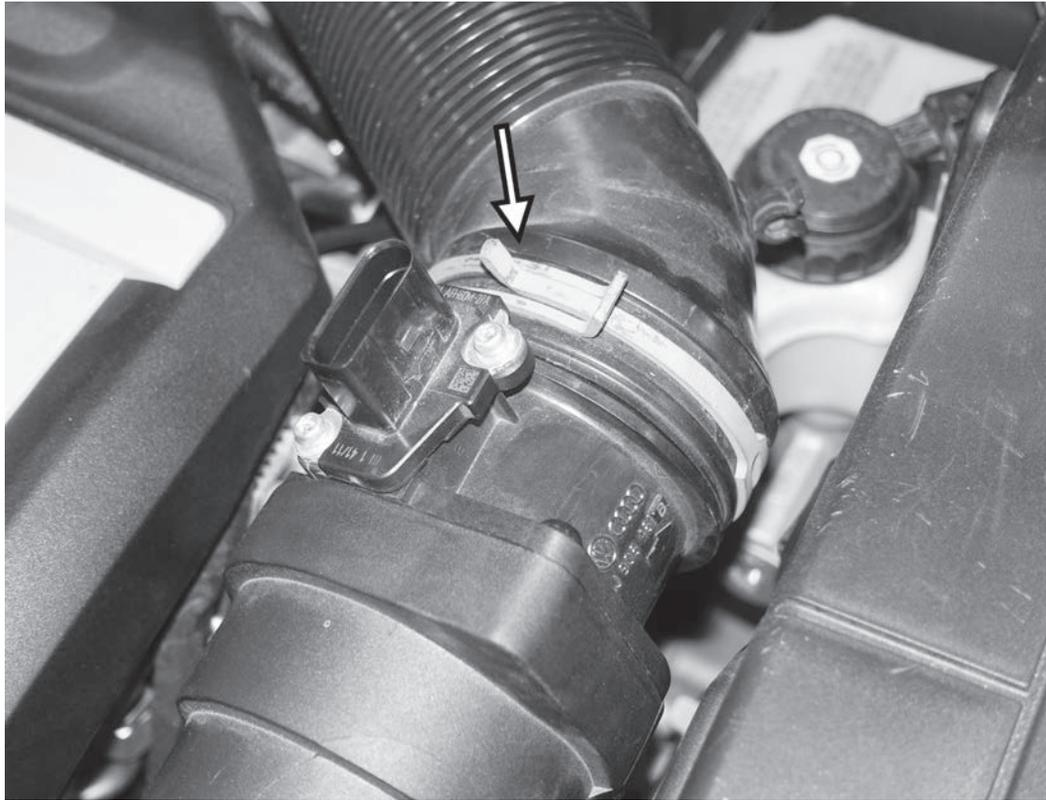

5) Squeeze the hose clamp holding the accordion inlet elbow to the back side of the MAF sensor, and slide the clamp off the MAF sensor. Separate the inlet elbow from the MAF sensor.

6) Remove the 5mm allen screw from the back side of the airbox. This holds the airbox bottom in place, not the airbox cover.

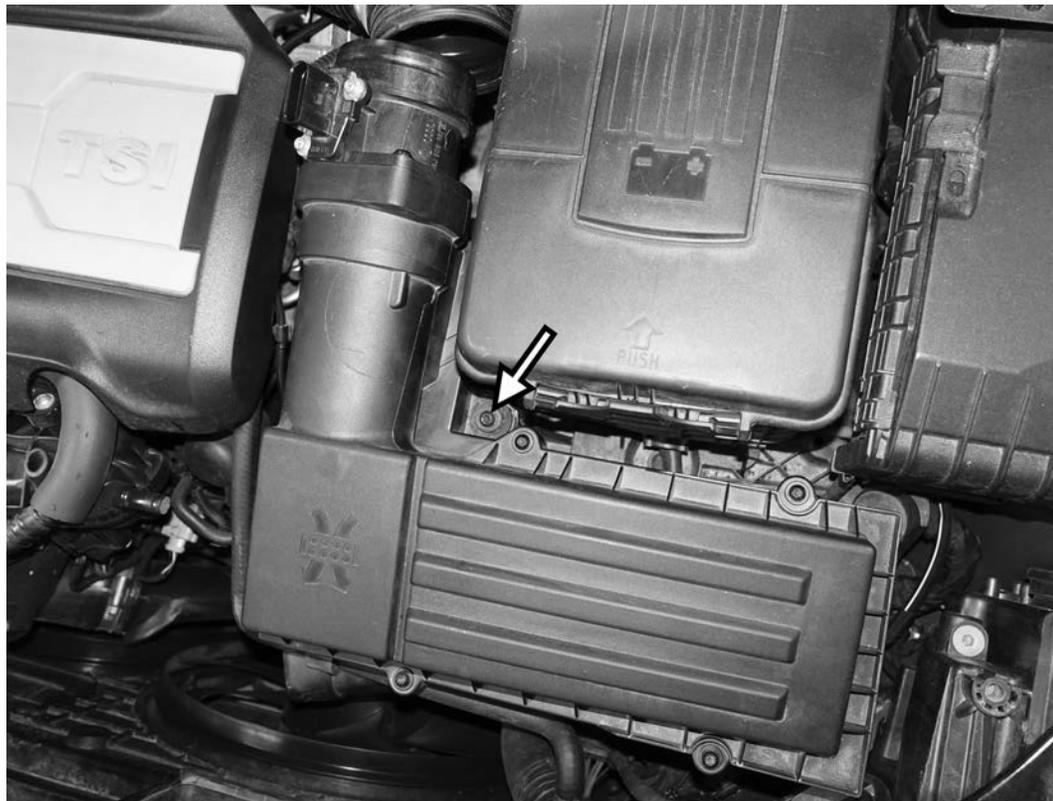


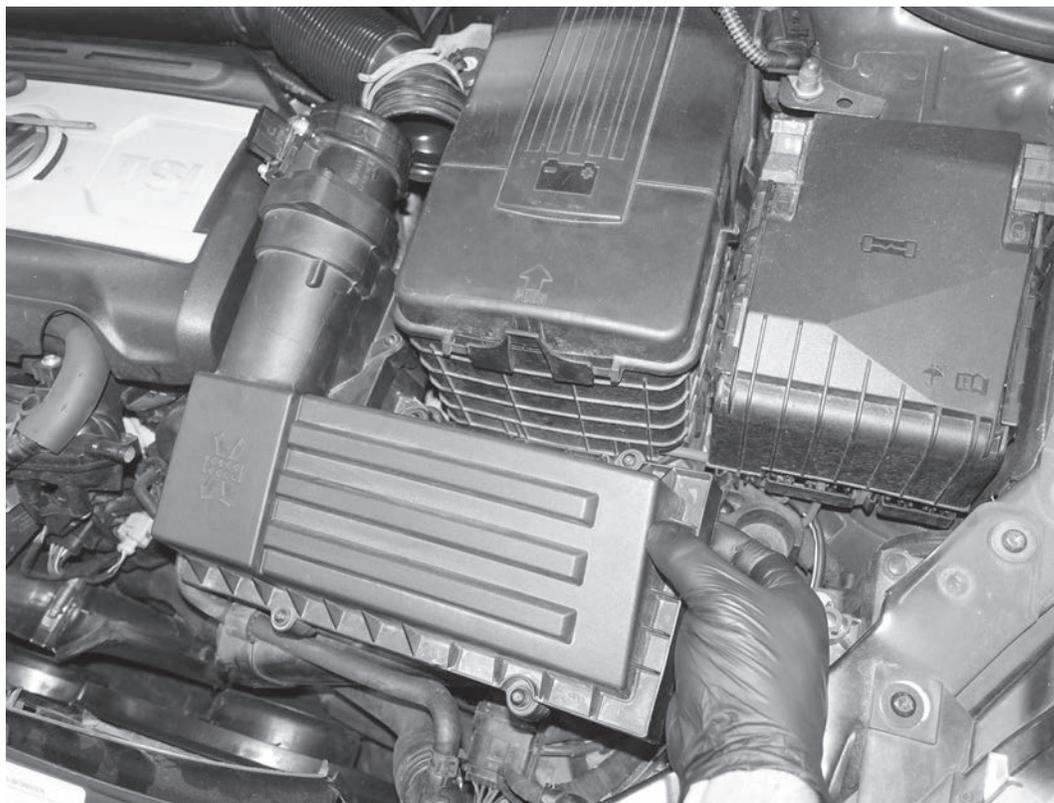

7) Lift the left side of the airbox up to pull off the rubber mounting post underneath. Lift the right side of the airbox from the other rubber mounting post to separate the airbox from the car.

APR

8) Raise the airbox out of the car, making sure to keep the coolant line on the right side from catching the airbox. As you lift up the airbox, be aware of the airbox drain on the left side that will come up with the airbox.

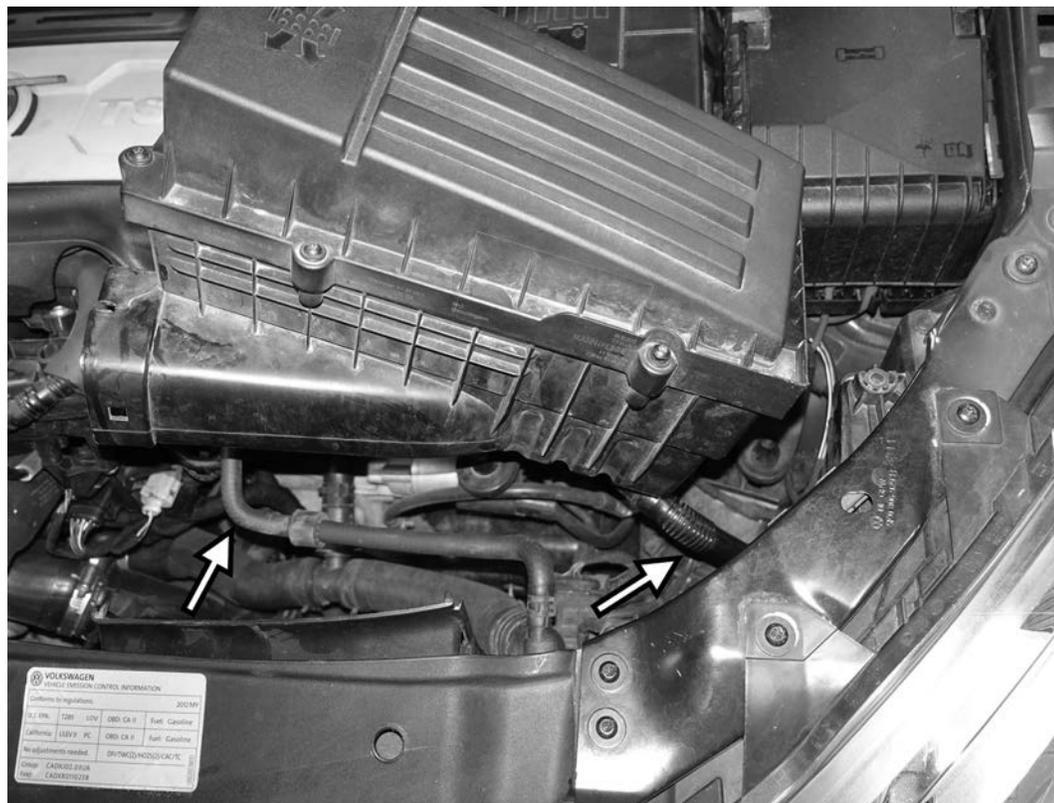



TL100128



9) Unscrew the two T25 screws holding the front of the airbox inlet scoop from the back of the radiator core support.

10) Remove the two T30 screws holding the MAF sensor to the back of the factory airbox and remove the sensor and housing from the airbox.

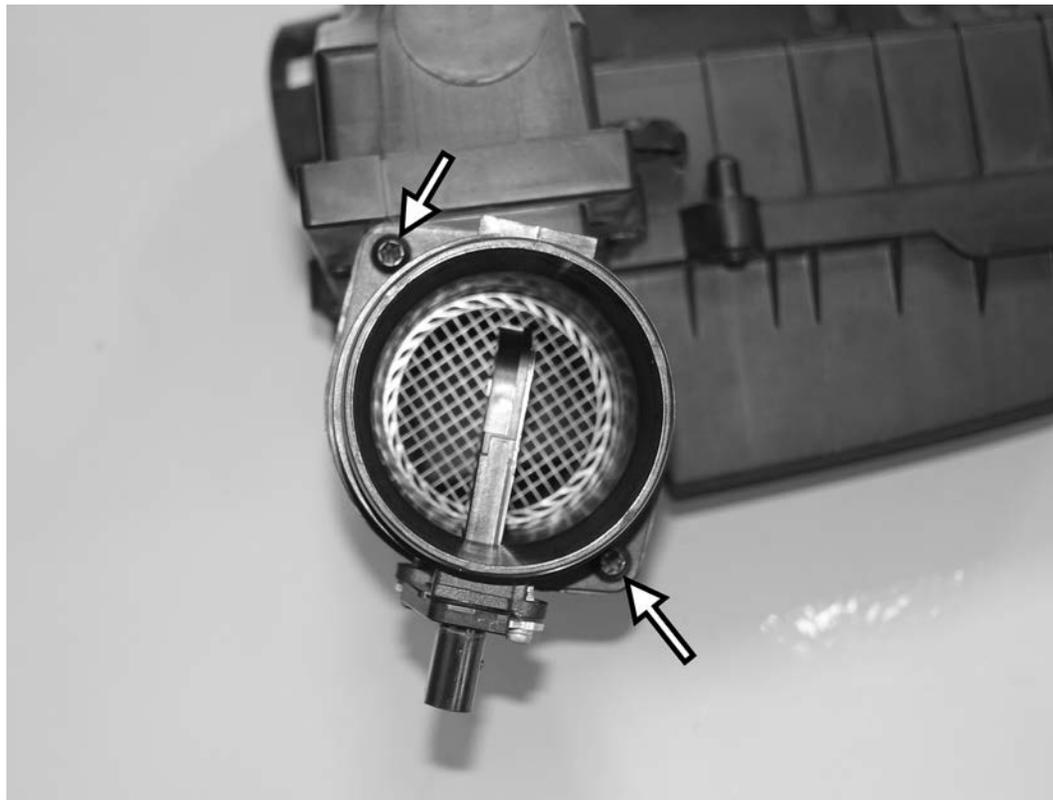

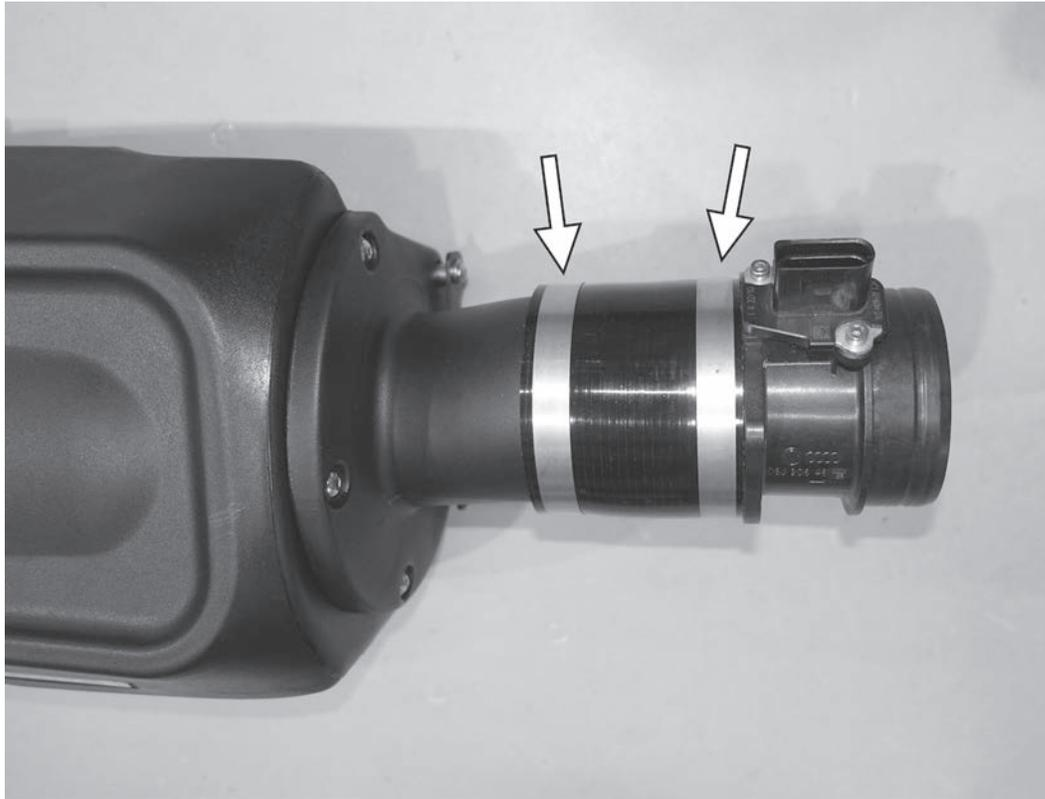


11) Using the supplied silicone coupler and two hose clamps, loosely install the MAF sensor to the back of the APR airbox in the same orientation as the with the stock sensor.

APR

12) Mount the supplied “L” bracket to the right mounting point that the factory air scoop mounted to on the back of the radiator core support using one of the two original T25 screws.



TL100128

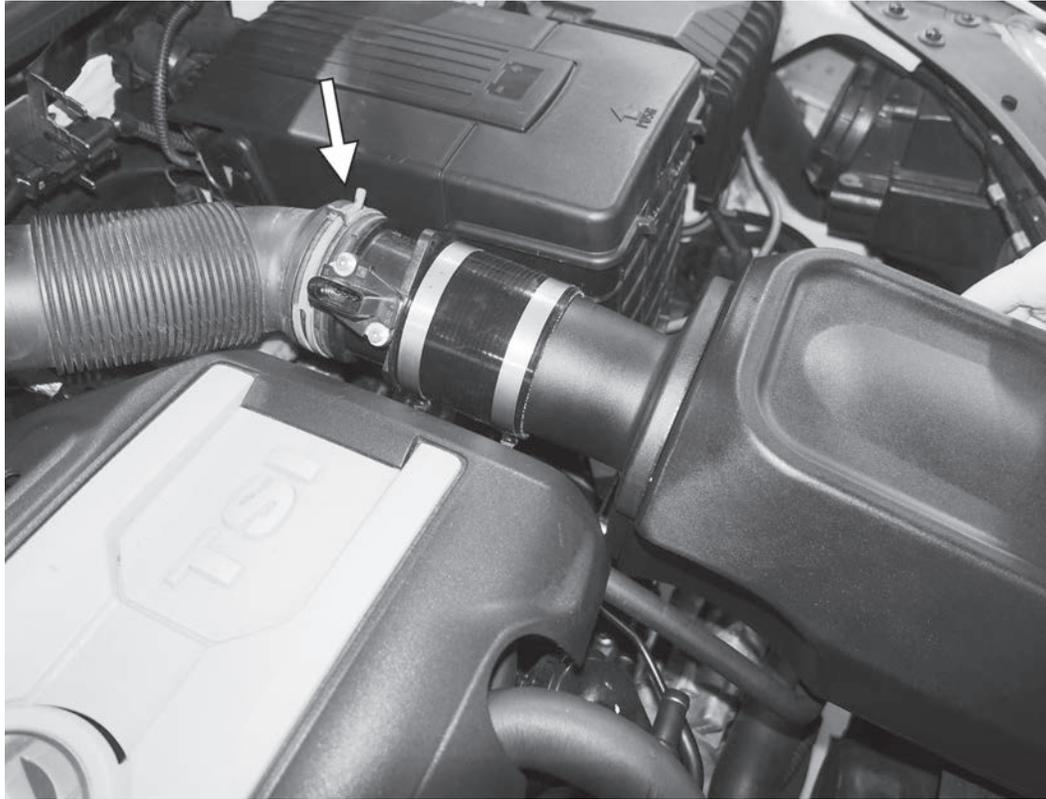


13) Loosely install the APR intake assembly in the car. Attach the according inlet elbow to the back of the MAF sensor housing and secure with the factory spring clamp.

APR

14) Loosely install the supplied 5mm allen screw with washer to hold the bracket on the back of the APR intake to the factory airbox mounting point.



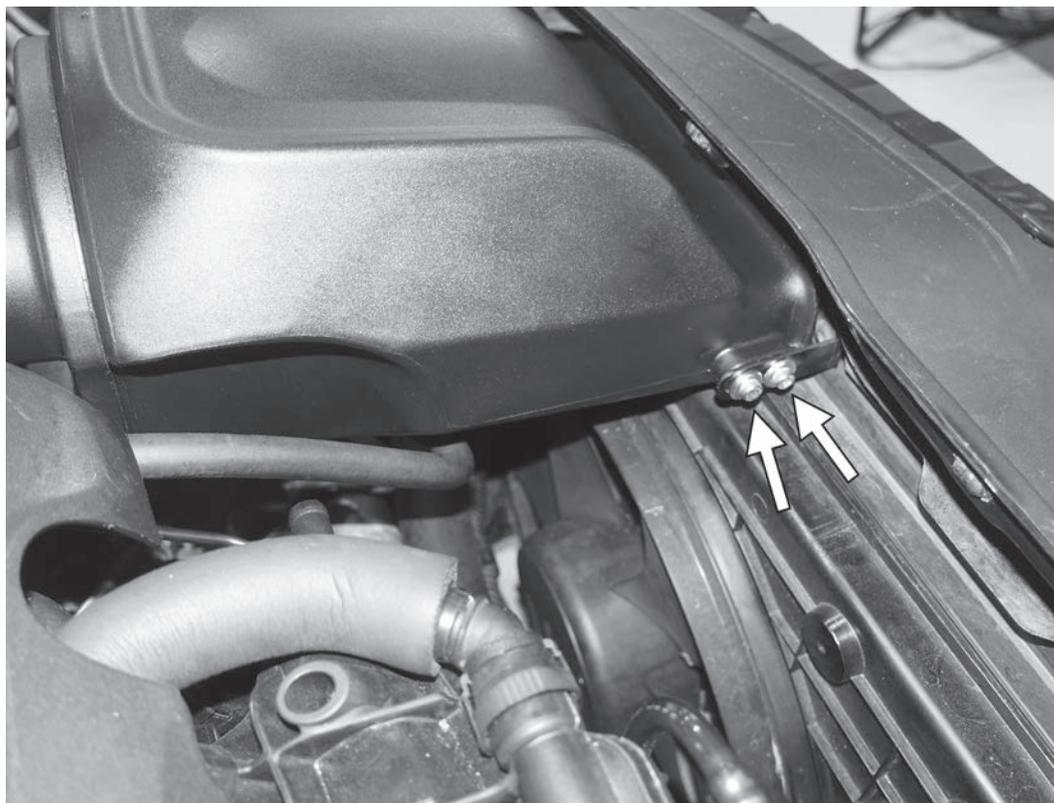

15) Using the supplied blue thread locker on the screws, install and tighten the two 3mm allen screws with washers to hold the front “L” bracket to the mounting bases on the front right of the APR intake.

APR

16) If necessary, adjust the length of the silicone coupler between the MAF housing and the APR intake so the rear accordion inlet tube sits in its original position. Tighten the two hose clamps on the silicone coupler, and then tighten the 5mm allen holding the rear APR bracket to the factory airbox mounting point.





17) Reconnect the electrical connector to the MAF sensor. Reclip the MAF sensor wiring harness back onto the accordion inlet tube.

APR

#TL100128

GO APR.COM