

FMEC4 Fitting Instructions

Please thoroughly read through and familiarise yourself with these instructions in their entirety prior to beginning any part of the installation process of any component. Please also ensure the vehicle and engine has cooled down sufficiently to avoid risking possible skin burns or other injury.


TOOLS NEEDED:

10mm deep Socket, suitable drive and extension bar

1. Open the bonnet, if you have cut the factory engine cover to suit your *FMINDF500* as shown below, please pull it vertically with a short sharp pull at each corner to remove it.




2. We will be using the three locations detailed below to attach FMEC4 to the engine bay.

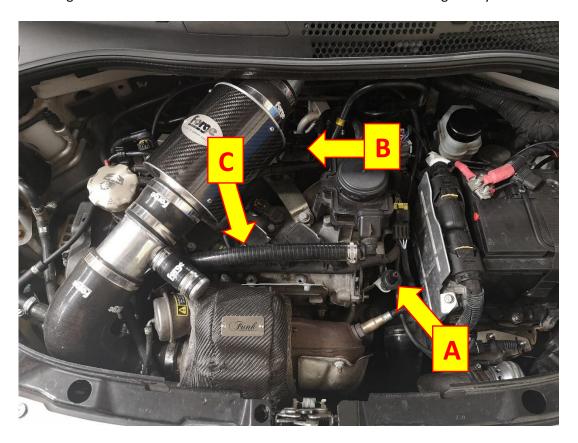






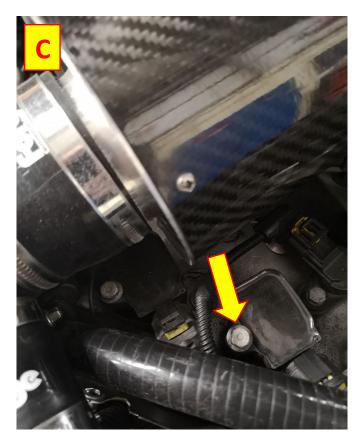

3. Using a 10mm socket, suitable drive and extension bar remove the fastener holding the coil pack labelled below.

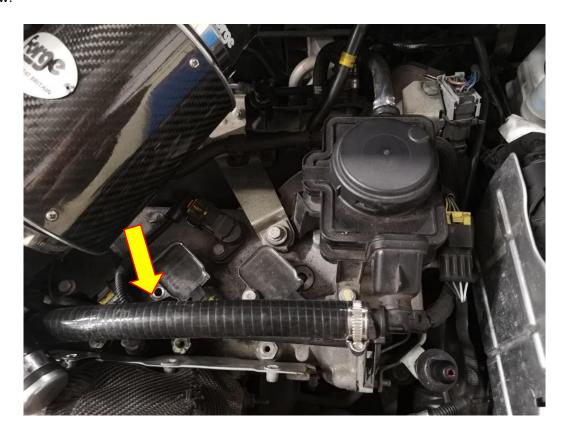


4. You will need these two rubber mounting grommets that came with the OEM engine cover to attach FMEC4.



5. Using these OEM rubber grommets they can be fitted to FMEC4 as shown below.



6. Please take the items below from the FMEC4 fitting kit as you will need it for the next stages.

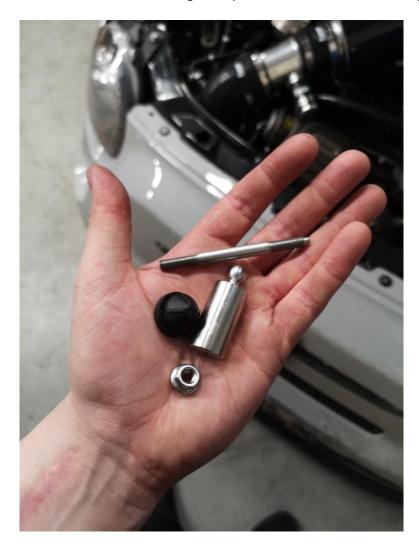


7. Take the supplied rubber grommet and connect it to the remaining bracket on FMEC4.



8. Now that you have all three rubber grommets attached to FMEC4, take the supplied red grease, and smear a small amount onto the centre of each of the three grommets similar to as shown below.




9. Screw the flanged nut down the thread of the shaft. Make sure that the orientation of the shaft is as shown below, the lead in on the bolt is used to help screw it through the coil pack.

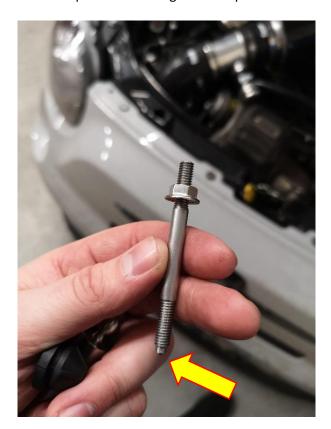

10. Using a 10mm deep socket, suitable drive and extension bar screw the nut to attach the coil pack securely.



11. You can now screw on the machined mounting boss hand tight.

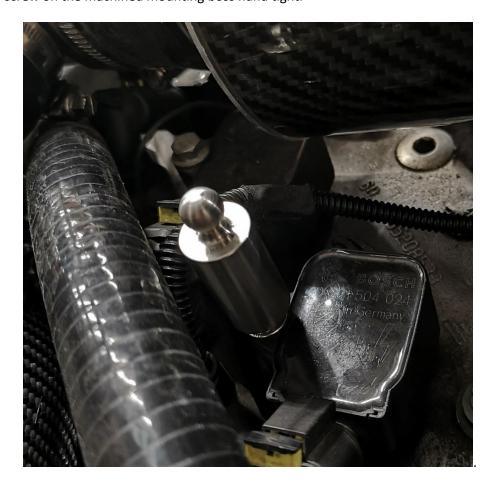

12. Attach FMEC4 to your engine, we recommend gently pushing around the rubber grommet at the lowest part of the incorporated bracket at each corner one at a time to attach it - DO NOT push from the middle of the carbon engine cover as this could **DAMAGE** the component.

Please also note that this applies to the removal of the engine cover. Ensure that you use two fingers around each bracket individually, and carefully pull vertically from these points ONLY. You may find it easier if the rubber grommets are left on the mounting pegs, and you pull the bracket off of them.

IF IN DOUBT, PLEASE WATCH THE FMEC4 FITTING VIDEO ON OUR YOUTUBE **CHANNEL**



13. You have now successfully installed your Forge Motorsport engine cover, enjoy your new Forge Motorsport product.

> Check out www.forgemotorsport.co.uk and www.forgemotorsport.com For a full range of performance products for your vehicle.

If you have any questions or concerns about this product or anything else, please feel free to contact your local or preferred Forge Motorsport Dealer/Installer or you may contact us directly.

Forge Motorsport UK Forge Motorsport USA Forge Motorsport ASIA +886-4-22516887

(+44)1452 380999 (407)-447-5363

info@forgemotorsport.co.uk sales@forgemotorsport.com sales@forgemotorsport.asia











